

WORLD'S MOST COST-EFFECTIVE LOGGER

Aria Standalone Voice Logger



- Fully stand-alone & Open source API for 2nd development
- 32GB TF Card & Customizable Logo with PVC Label Sticker
- Remote central management & Multi-level user authorization
- Without Voice Announcement, without Answering Machine

All-in-One Design

The all new AR-9100N series multi-ch recording sys is an all-around telephone recording sys. The sys has built-in HDD(1T-8T) or TF card(8G-512G) which allows all-day recording without turning the PC on.



Fully Stand-alone Voice Logger

Without any screen, AR-9100N series is the most cost-effective at the lowest price all over the world. Like for AR-9108N (with 32G TF Card), its bulk price is similar to the DAR-8U(8CH USB Phone Recorder). No PC required, and PC Virus Free.

Digital recording provides longer working time

AR-9100N series store up to 1120 hours/ 32 GB of calls. It also supports loop recording.

Green/Portable Software

Advantages comparing to the Installed Software: no Registry Writing, no Virus Packing, no Redundant System Files, no Commercials. Provides more DIY options for Customization and Localization.



High Quality Audio Circuit Design

AR-9100N series provide high quality recording sound with low noise, low attenuation, high-sensitivity circuit.



Various Recording Interfaces

Records from PSTN, Analog Extension, Digital Extension, 2-way / Broadcast Radio, Intercom, Microphone, Live Recording (meeting), Fixed Cellular Terminal (FCT) and more.



Completed Call Records

Records call conversation with call type, date, time, Inbound/outbound number, call duration, recording duration and important mark.



Automatic / Manual Recording

Records all calls automatically as default or configures it as manually start. Be available with Voltage Trigger, Voice Trigger, and Continuous Recording.

Open source API & SDK

AR-9100N Voice Logger API allows 2nd-development for external integration.



P2P Cloud Server

One-Click WAN Access via P2P Cloud Server. Online Upgrading about devices' firmware & software via cloud server.



Central Management Sys(CMS)

Centralized Management Sys is a great tool for multi sites scenario. Free Licence to enjoy the use of CMS. User can monitor all devices on a single PC lively.



Powerful Pop-Up Functions:

- 1) "Keyword Reference" in the Note Pop-Up is used for the vital calls like contracts done by telephone of Banks, Insurance Corp., Call Center and soon;
- 2) Incoming Call Pop-Up;
- 3) Outgoing Call Pop-Up;
- 4) Contact Remarks can be displayed in Call Pop-Up;
- 5) New phone numbers can be added while incoming call popup.



Various Searching Conditions

Recording files can be searched with multiple search options including keywords, date, time, duration, channel, phone number, call index number and so on.

Multi-Level User Accounts

User can assign various authorization levels for supervisor and staff in a company. Like user can check and access all channels for Supervisor's account, and only single or several channels for the Inferior account.



Without Voice Announcement nor Answering Machine

Recording announcement can't be played when you answer a call. And it can't be used as one answering machine.

Cloud Storage

AR-9100N logger is capable to backup all sites data by central management software (CMS).



Storage Capacity Management

Auto loop recording Storage capacity notification

Customize and DIY

If need the software can be customized. DIY of Software Skin Color, Logo & Name, Universal Language Translation and so on.



Without Music on Hold

The pre-recorded music or OGM for the callers on hold via the different DTMF key groups.



Phonebook

Powerful Phonebook with Classifications & Contact Remarks. (Without Software Dial-Up function)

10-Levels Voice Sensitivity

10-Levels Voice Sensitivity of "Audio Trigger Recording", the special optimization for Two-Way Radio System.



Automatic Backup

Automatic Backup to PC when connecting LAN/WAN. Automatic backup utility to head office from all branches along with centralised management system function.

Statistics Chart

Analysis calls of each day and each hour. Supports the Excel Outputting.

Real-time Monitoring

Live monitor line status and call conversation by administrator's PC.




Without Station Management Detail Recording

9100 series can't support PBX SMDR input.

Powerful Network Management


Achieve to access / manage the voice loggers and live monitoring remotely.



Superior Quality

The most important key for recording device is reliable quality.


AR-9100 N Series Standalone Voice Logger

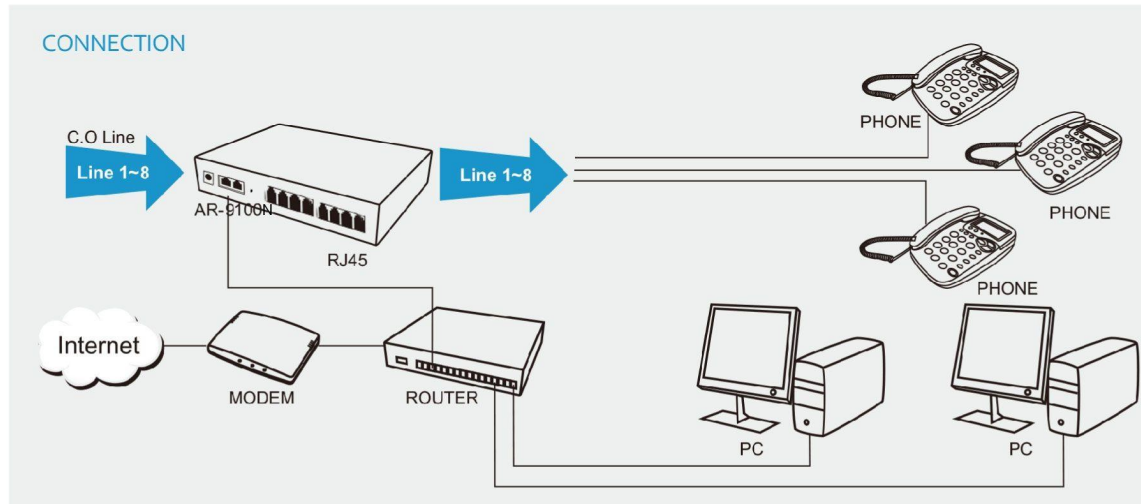

MODEL

Model	Touch LCD	Port	Storage
AR-9102N	No	2	TF Card(32GB included)
AR-9104N	No	4	TF Card(32GB included)
AR-9108N	No	8	TF Card(32GB included)

DIMENSION



(160*110*30mm for 1/2/4ch, 220*130*30mm for 8ch)

TECHNICAL SPECIFICATIONS

ITEM	SPECIFICATION
Record Channel	2/4/8Channels
TF CARD	32GB
Touch Screen	No
Format	Wav / ALaw
Recording Time	1120 Hours / 32 gb
Start recording	Voltage/VOX/Hotkey
Off Hook Voltage	3-80V
On Hook Voltage	10-100V
Caller ID Format	DTMF/FSK
CID detection sensitivity	0dB to -32dB
Recording frequency	0Hz to 8000Hz
Input impedanceAC	AC:100K, DC:5.1M

S/N ratio	>60dB
Crosstalk ratio	>70dB
Power Supply	DC8V(1/2/4ch), DC12V(8)
Rated current	200mA(1/2ch), 350mA(4ch)
Max. Start current	300mA(1/2ch), 500mA(4ch)
Rated power	2W(1/2ch), 3W(4ch)
Weight	0.9kgs(1/2/4ch), 1.2kgs(8ch)
Temperature	-20°C to 60°C
Humidity	10% to 90%
Network	RJ-45
Package Content	AR9100N/DC8V Power/ RJ11 cable

Call us Now:

Sales ID:- Sales@ariasolutions.net

Sales P:- 0120-4763988

Support ID:- support@ariasolutions.net

Support P:- 0120-4763963

Corporate Office: CS 40, 3rd Floor, Ansal Plaza, Sec - 1, Vaishali, Ghaziabad, UP - 201010 (India).

Registered Office: 106, Vardhman Master Plaza, Plot No - 2, Gazipur, New Delhi - 110096 (India).

website: www.ariatelecom.net www.arianamaste.com